


RG59 UL + POWER CABLE COAXIAL CABLE

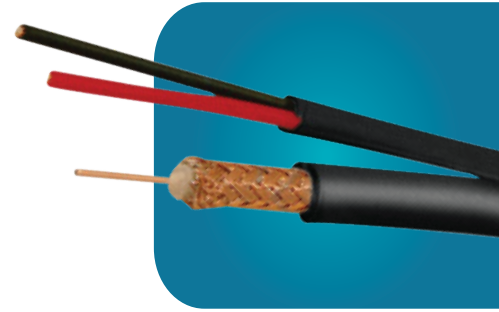

CONSTRUCTION PARAMETERS:

- Inner Conductor**
 - 0.81 mm Bare Copper
- Dielectric**
 - 3.66 mm Foamed PE
- Shield 1**
 - 100% Bonded Aluminum Foil
- Shield 2**
 - Nom. 4.20 mm Copper Clad Aluminum
- Jacket**
 - 6.2 mm PVC (Color by your choice)
- Power Wire Conductor**
 - 16 x 0.254 mm Copper Clad Aluminum
- Power wire Diameter of insulation**
 - 1.50 mm PVC/PP

ELECTRICAL CHARACTERISTICS:

- Capacitance**
 - 67 pF/m
- Impedance**
 - 75 +/- 3 Ω
- Velocity of Propagation**
 - 0.66
- Sparker Test (VAC)**
 - 4
- Operating Temp Range (PVC)**
 - -25° to 70°
- RoHS**
 - Yes

ESPECIFICACIONES:

TIA/EIA-568-B.2

CERTIFICACIÓN:

Sistema de Calidad ISO-9001.

ORDER INFORMATION:

- Inner Package**
 - 1000FT/Plastic Spool, 500FT/Plastic Spool

ATTENUATION (20°):

FREQUENCY (MHZ)	MAX. ATTENUATION (dB/100m)
5	2.50
55	6.10
83	7.30
187	10.70
250	12.40
300	13.70
350	14.90
400	16.00
450	17.10
500	18.20
550	19.10
600	20.00
750	22.60
865	24.40
1000	26.40